


Dedicated Horizontal Coil Specifications

HERCULES MODEL	ADP COIL MODEL	CABINET HEIGHT		SUPPLY OPENING		RETURN OPENING		WIDTH
		A	B	C	D	E	F	
HC1.5/2TXV-A	HD12936E145B2647AP	14.50	21.50	13.00	19.75	13.50	20.25	26.5
HC1.5/2TXV-B	HD12936E175B2647AP	17.50	21.50	16.00	19.75	16.50	20.25	26.5
HC2.5/3TXV-B	HD14936E175B2647AP	17.50	21.50	16.00	19.75	16.50	20.25	26.5
HC2.5/3TXV-C	HD14936E210B2647AP	21.00	21.50	19.50	19.75	20.00	20.25	26.5
HC3.5/4TXV-C	HD19960E210B2647AP	21.00	21.50	19.50	19.75	20.00	20.25	26.5
HC3.5/4TXV-D	HD19960E245B2647AP	24.50	21.50	23.00	19.75	23.50	20.25	26.5
HC5TXV-C	HD16960E210B2647AP	21.00	21.50	19.50	19.75	20.00	20.25	26.5
HC5TXV-D	HD16960E245B2647AP	24.50	21.50	23.00	19.75	23.50	20.25	26.5
HCE2.5/3TXV-B	HD15936E175B2647AP	17.50	21.50	16.00	19.75	16.50	20.25	26.5
HCE2.5/3TXV-C	HD15936E210B2647AP	21.00	21.50	19.50	19.75	20.00	20.25	26.5
HCE3.5/5TXV-C	HD50960E210B3147AP	21.00	21.50	19.50	19.75	20.00	20.25	31.5
HCE3.5/5TXV-D	HD50960E245B3147AP	24.50	21.50	23.00	19.75	23.50	20.25	31.5

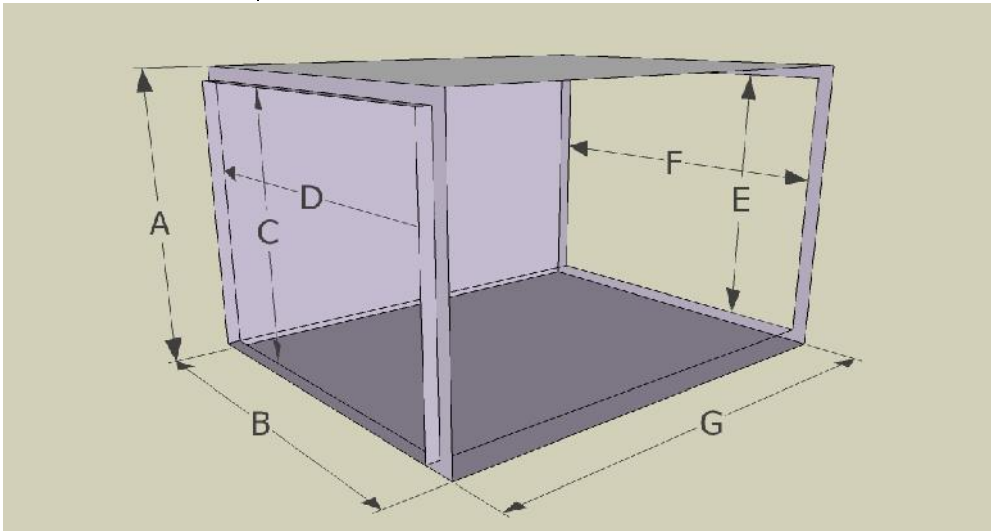

GENERAL SPECIFICATIONS

- : Rifled Copper Tubing
- : Patented lance fin design
- : Ratings in conformity with ARI standard 210
- : Refrigerant connections on side of coil
- : UL Listed
- : Refrigerant connections are 3/8" ODF liquid and 3/4" ODF (18-36 mbtu) or 7/8" ODF (42-60 mbtu) suction left or right airflow furnaces.
- : Top, front and back panels are removable for easy service or coil cleaning
- : Drain pans are molded of high temperature (450 F) engineering polymer
- : Dual 3/4" FPT condensate drains on front and back of coil allows flexibility of placement to accommodate

- : Coils are individually tested at 450 PSI, then pressurized and sealed
- : Factory installed screw-on (bleed and non-bleed) HP or A/C TX valves.
- : Heavy 24 gauge embossed galvanized cabinets fully lined with 5/8" faced insulation
- : All coils are foam packed with bar coding on label
- : Easy to use filler strip, if coil dimension is larger than furnace
- : Drain pan has trough to fully drain condensate away
- : 410a Heat Pump TXV factory installed

QUALITY = CUSTOMER SATISFACTION