

STANDARD FEATURES:

- 18 ga. (1.3) galvanized steel channel frame with 20 ga. (1.0) casing components.
- 3/4" (19) dual density insulation, exposed edges coated to prevent air erosion. Meets the requirements of NFPA 90A and UL 181.
- Side and bottom full size access panels for ease of maintenance and service.
- Ultra-energy efficient ECM fan motor with overload protection. Solid state EPIC fan volume controller.
- Motor blower assembly mounted on special 16 ga. (1.6) angles and isolated from casing with rubber isolators.
- Single point electrical connection.
- Controls mounted as standard on RH side as shown. Fan coil ordered with LH controls (optional) are inverted and discharge duct hanging location will therefore change.
- 1" (25) throwaway fiberglass media filter.

Dimensional Data

Unit Size	Nominal CFM (l/s)	W	W2	Inlet IW x IH	Outlet Duct Size F x G	K	M	Filter Size
8	800 (378)	28 3/4 (730)	23 (584)	19 x 15 (483 x 381)	11 1/4 x 10 1/2 (286 x 267)	16 1/2 (419)	6 1/2 (165)	20 x 16 (508 x 406)
16	1600 (755)	42 3/4 (1086)	37 (940)	33 x 15 (838 x 381)	15 1/8 x 11 3/4 (384 x 298)	23 (584)	14 (356)	35 x 16 (889 x 406)

Electrical Data

Unit Size	Motor HP	EPIC ECM Motor FLA			
		120V	208V	240V	277V
8	*	3.3	2.2	2.1	2.1
16	*	7.2	4.9	4.7	4.6

* The EPIC ECM is a variable horsepower motor. Refer to Selectworks schedule for actual power consumption. FLA = Full load amperage. All motors are single phase/60 Hz.



ELECTRIC COIL SECTION:

- Hinged door with heater element module for easy access, removal and replacement of heater element without disturbing ductwork.
- Coil installed on unit discharge.
- Insulated coil element wrapper.
- Automatic reset high limit cut-outs (one per element).
- Flanged outlet duct connection.

Electric Coil Options:

- Door interlock disconnect switch.
- SCR Controls
- Power circuit fusing.
- Class 'A' 80/20 Ni./Cr. Wire.
- Dust tight construction.
- Manual reset secondary thermal cut-out.

Voltage:

- Single Phase, 60 Hz.:
- 120V 208V
 - 240V 277V
- Three phase, 60 Hz.:
- 208V 480V (4 wire wye)

SCHEDULE TYPE:


PROJECT:

ENGINEER:

CONTRACTOR:

Page 1 of 2.
Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
2 - 1 - 16	35FH	6 - 9 - 14	35FH-6

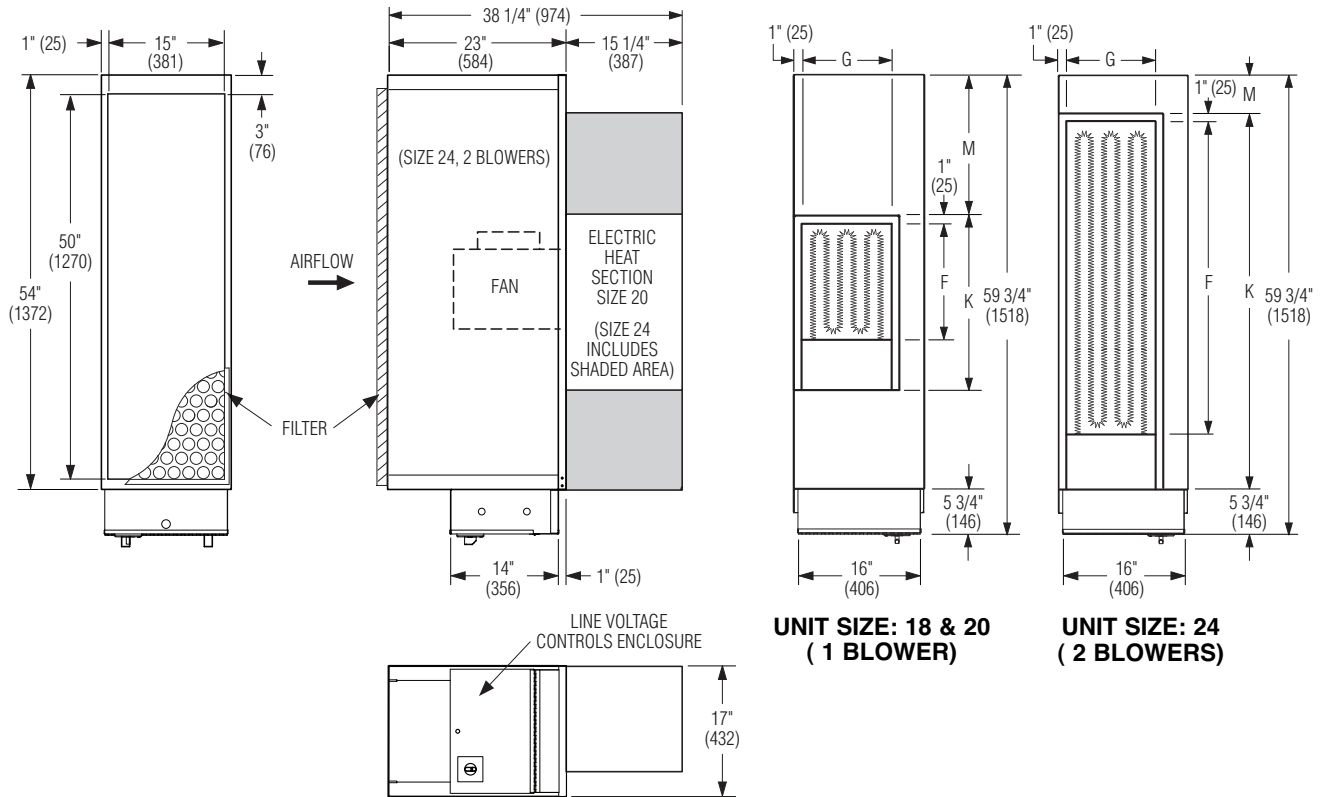

CONTROLS:

- By others.
- Nailor Thermostat.

OPTIONS AND ACCESSORIES:

- 2" (51) pleated disposable filter.
 - MERV 8
 - MERV 13
- Fiber-free liner.
- Perforated metal liner.
- Steri-liner.
- Steri-liner w/perf.
- 1" (25) fiberglass liner.
- Hanger brackets.
- LH controls location/configuration.
- Toggle disconnect switch.
- Ducted return filter rack connection (see separate submittal 35FH/37FH-FFR).

Dimensional Data

Unit Size	Nominal CFM (l/s)	Outlet Duct Size F x G	K	M	Filter Size
20	2000 (944)	15 1/4 x 11 3/4 (387 x 298)	23 (584)	18 3/4 (467)	52 x 16 (1321 x 406)
24	2400 (1038)	41 1/4 x 11 3/4 (1048 x 298)	49 (1245)	5 (127)	52 x 16 (1321 x 406)

Electrical Data

Unit Size	Motor HP	EPIC ECM Motor FLA			
		120V	208V	240V	277V
20	*	9.6	6.3	6.1	6.0
24	*	11.8	7.9	7.8	7.5

* The EPIC ECM is a variable horsepower motor. Refer to Selectworks schedule for actual power consumption. FLA = Full load amperage. All motors are single phase/60 Hz.



SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 2 of 2.
Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
2 - 1 - 16	35FH	6 - 9 - 14	35FH-6