


# MTA800

## GENERAL PURPOSE SPRAY ADHESIVE

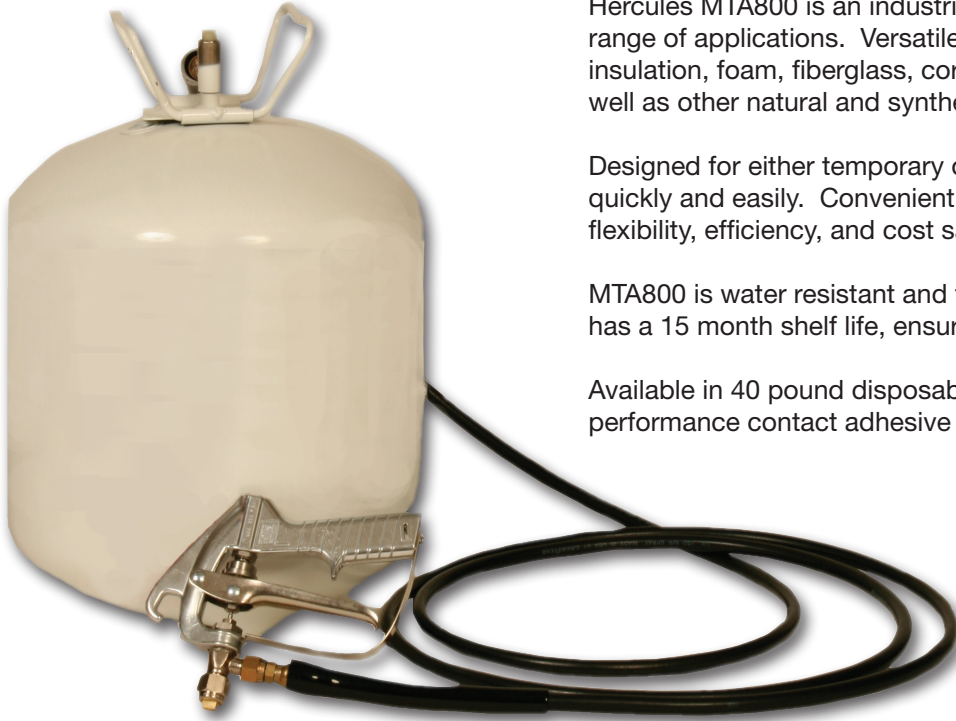

Hercules MTA800 is an industrial strength contact adhesive for a wide range of applications. Versatile and cost effective, MTA800 bonds to insulation, foam, fiberglass, cork, fabrics, glass, metal, and plastics as well as other natural and synthetic materials.

Designed for either temporary or permanent bonding, MTA800 applies quickly and easily. Convenient dispenser options offer application flexibility, efficiency, and cost savings.

MTA800 is water resistant and temperature resistant to 150°F (66°C) and has a 15 month shelf life, ensuring maximum performance and usage.

Available in 40 pound disposable canisters, MTA800 is a versatile, high performance contact adhesive for a broad range of applications.

### FEATURES & BENEFITS

- Contains no Ozone Depleting Substances (ODS) or Hazardous Air Pollutants (HAPs)
- Versatile contact adhesive is water resistant and temperature resistant to 150°F (66°C)
- Applies easily at temperatures as low as 30°F (-1°C)
- Fast tack
- Designed for either temporary or permanent bonding applications
- 15 month shelf life
- Bonds to a wide variety of materials including insulation, foam, fiberglass, cork, fabrics, metal, glass, and plastics as well as other natural and synthetic materials
- Canister dispenser offers high coverage rates and maximum efficiency
- No special tool required for application

Contact Hercules Industries today for additional product information and a complete list of our products

North America 303-937-1000  
Toll Free North America 800-356-5350  
[www.herculesindustries.com](http://www.herculesindustries.com)



# MTA800

## GENERAL PURPOSE SPRAY ADHESIVE

### TECHNICAL PRODUCT SPECIFICATIONS

Specification	Typical Value	Test Method
Base Material	Synthetic Polymer	
Solvent	Methylene Chloride	
Appearance	Clear	
Adhesive % Solids	32 - 34%	
Liquid Specific Gravity	1.19 - 1.21	
Shelf Life	15 Months	
Flammability - Aerosol	Flammable	ASTM E-681-4
Flammability - Canister	Flammable	Industry Flame Projection Test
Temperature Resistance	150°F (66°C)	
Ozone Depleting Substances	None	
Hazardous Air Pollutants	None	
Volatile Organic Compounds	< 445 g/L	
Open Time	10 - 15 minutes	
Dry Time	2 - 4 minutes	

### APPLICATION INSTRUCTIONS

MTA800 is designed for either temporary or permanent bonds. For temporary bonds, apply to one surface; for permanent bonds, apply to both surfaces to be joined. Prior to bonding, ensure the surfaces to be bonded are free from dirt, grease, oils, or any other solvents or contaminants. Substrates to be joined and adhesive must be 60°F or higher for best results.

- Spray an even coat of adhesive covering 80 - 100% of both surfaces
- Allow to dry 2 - 4 minutes and become tacky; for porous surfaces and crucial areas, apply a second coat after the first has become tacky.
- Place the coated surfaces together, applying uniform pressure for strongest bonding

### STORAGE & USE

MTA800 is not damaged by freezing; return to room temperature prior to use. For canister products, keep cylinders off floor when the temperature is below 60°F.

### PRODUCT CONFIGURATIONS

- 40 pound disposable canister

Contact Hercules Industries today for additional product information and a complete list of our products

North America 303-937-1000  
Toll Free North America 800-356-5350  
www.herculesindustries.com

