




Straight Boot



Used as the transition from round pipe to the register opening on forced air duct systems, our straight boots allow airflow directly through the fitting without any turns.

- Boots constructed of 26Ga. Galvanized Steel ASTM-A653-00
- SMACNA Standards
- All gauges and reinforcements are in compliance with 2005 SMACNA standards for duct fabrication

ITEM	D	d _{collar}	w	ℓ	d _{box}	A	B	C
S305	5.125	1.5	3.25	10	1	3.375	2.625	1.375
S306	6.125	1.5	3.25	10	1	3.5	2	2.75
S307	7.125	1.5	3.25	10	1	5.5	1.625	3.75
S420	4.125	1.5	2.25	10	2	4	3.125	2
S440	4.125	1.5	4	10	2	4.5	2.875	0.25
S520	5.125	1.5	2.25	10	2	3.625	2.75	3.125
S522	5.125	1.5	2.25	12	2	4.375	3.5	2.875
S540	5.125	1.5	4	10	2	3.875	3.125	0.375
S542	5.125	1.5	4	12	2	3.375	3.625	1.25
S620	6.125	1.5	2.25	10	2	4.5	2.125	4
S622	6.125	1.5	2.25	12	2	4.625	3.375	3.125
S640	6.125	1.5	4	10	2	3.625	2.25	1.5
S642	6.125	1.5	4	12	2	5.25	3.125	1.5
S740	7.125	1.5	4	10	2	3.5	1.75	2.5
S742	7.125	1.5	4	12	2	6.71	2.875	4.125
S844	8.125	1.5	4.25	14	2	7.25	3	4.5
S862	8.125	1.5	6	12	3	5	2.125	2.125

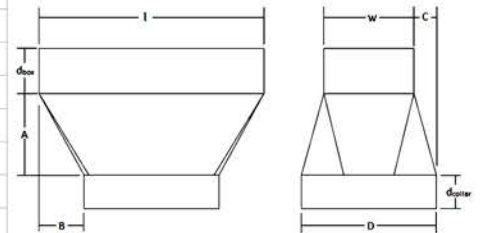

*all dimensions are in inches ± ¼"



1-800-870-4305

