




Torpedo Boot



Used as the transition from round pipe to the register opening on forced air duct systems, our torpedo boots turn a parallel 90 degree from the pipe to the register.

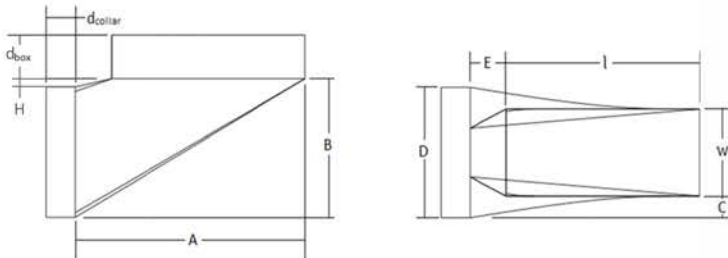

- Boots constructed of 26Ga. Galvanized Steel ASTM-A653-00
- SMACNA Standards
- All gauges and reinforcements are in compliance with 2005 SMACNA standards duct fabrication

ITEM	D	d _{collar}	w	l	d _{box}	A	B	C	E	H
T305	5.125	1.5	3.25	10	1	12.125	5.5	1.75	1.875	0.0625
T306	6.125	1.5	3.25	10	1	11.875	7	2.75	1.75	0.125
T420	4.125	1.5	2.25	10	2	13	4	1.75	2.875	-0.25
T440	4.125	1.5	4	10	2	12.25	3.5	0	2.125	0.125
T520	5.125	1.5	2.25	10	2	12.125	4.5	2.875	2	0.375
T522	5.125	1.5	2.25	12	2	14.125	5.25	2.75	2.125	0.25
T540	5.125	1.5	4	10	2	12.125	5	1	2.125	0.125
T542	5.125	1.5	4.25	12	2	14.25	5	1	2.125	0.25
T560	5.125	1.5	6	10	2	13.125	4.75	-0.875	3.125	0.125
T620	6.125	1.5	2.25	10	2	12.25	6.25	3.75	2.125	0
T622	6.125	1.5	2.25	12	2	14.25	5.5	4	2.125	0.125
T640	6.125	1.5	4	10	2	12	6	2	1.875	0.375
T642	6.125	1.5	4.25	12	2	14	6.25	2	2	0.25
T740	7.125	1.5	4	10	2	13.125	4.75	2.875	4.375	-0.25
T742	7.125	1.5	4.25	12	2	14.125	6.5	3	2.125	0
T862	8.125	1.5	6	12	3	15.5	7.25	2	3.625	-0.375

* All dimensions are in $\pm \frac{1}{4}$ "



1-800-870-4305

