



FlexFix



Berry Plastics® **FlexFix**
UL181B-FX Approved BOPP
Duct Tape


APPLICATIONS

- Tough, contractor grade closure system for flexible air ducts and connectors
- Suitable for use on metal to metal connections in HVAC applications

FEATURES & BENEFITS

- UL 181B-FX Listed (for use with flexible air ducts and closure systems)
- Features a long-life acrylic adhesive
- Hand tearable - Contractor friendly
- Excellent resistance to mold, humidity, flame spread, smoke generation, and high temperatures
- UV Resistant for incidental sunlight exposure in attic installations
- Complies with VOC requirements of SCAQMD Rule 1168
- **Contributes toward satisfying EA (Energy & Atmosphere) and IEQ (Indoor Environmental Quality) credits under LEED®.****

CONSTRUCTION

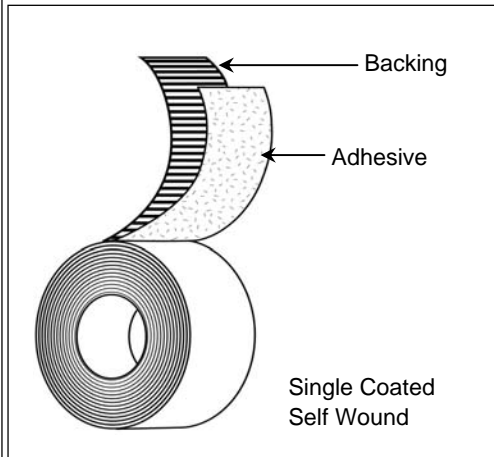

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Printed BOPP Film

Adhesive:

- Acrylic

Colors:

- Black, Metallic

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	3.1 mils	83.820 μ	ASTM D-1000
Adhesion to Steel	45 oz./in.	4.93 N/cm	PSTC-1
Adhesion to Backing	35 oz./in.	3.83 N/cm	PSTC-1
Tensile Strength	32 lb./in.	56.04 N/cm	ASTM D-1000
Maximum Performance Temperature	210° F	98.9° C	
VOC Content	0 g/L		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To the best of our knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, in each case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
1-800-343-7875 Fax 1-800-328-4822
www.berryplastics.com

Nieuwlandlaan B15 Aarschot Belgium
Ph: +32(0)16/55 36 00 Fax: +32 (0)16/55 36 74
11/18/2008