



# Adjustable Roof Flashing

Hercules Industries manufactures 18 different Adjustable Roof Flashing (ARF) ranging from 3" to 17" and are designed to fit double-wall flue pipe. Select roof flashing based on the pitch of desired roof build, ARF is recommended for pitched roofs. Adjustable Roof Flashing Vents are used to weatherproof the penetration of vent pipe through the roof. Vent pipes properly allow air into the desired venting system so that drains and gases can be vented safely outdoors and distribute flue gas temperatures.

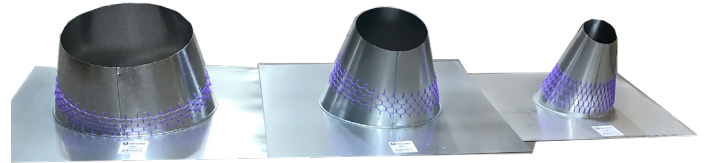

Description	Manufacture Part Number	Thickness	Material	Diameter A (in.)	Diameter B (in.)	C (in.)	Individual weight (LB)
3" ADJ ROOF FLASHING	3ARF	28 ga	Galvanized Steel	7	3	7.5	1.8
3 1/2" ADJ ROOF FLASHING	3.5ARF	28 ga	Galvanized Steel	7	3.5	7.5	1.8
4" ADJ ROOF FLASHING	4ARF	28 ga	Galvanized Steel	9	4	9	2.3
4 1/2" ADJ ROOF FLASHING	4.5ARF	28 ga	Galvanized Steel	9	4.5	7.5	2.2
5" ADJ ROOF FLASHING	5ARF	28 ga	Galvanized Steel	7	5	7.5	1.8
5 1/2" ADJ ROOF FLASHING	5.5ARF	28 ga	Galvanized Steel	9	5.5	7.5	2.2
6" ADJ ROOF FLASHING	6ARF	28 ga	Galvanized Steel	11	6	8	2.9
6 1/2" ADJ ROOF FLASHING	6.5ARF	28 ga	Galvanized Steel	10.5	6.5	7.5	2.9
7 3/4" ADJ ROOF FLASHING	7.75ARF	28 ga	Galvanized Steel	11	7.75	8	2.9
8 3/4" ADJ ROOF FLASHING	8.75ARF	28 ga	Galvanized Steel	13	8.75	8	2.9
10" ADJ ROOF FLASHING	10ARF	28 ga	Galvanized Steel	13	10	7	2.8
11" ADJ ROOF FLASHING	11ARF	28 ga	Galvanized Steel	15	11	9.7	4.1
12" ADJ ROOF FLASHING	12ARF	28 ga	Galvanized Steel	15	12	9	3.6
14" ADJ ROOF FLASHING	14ARF	28 ga	Galvanized Steel	16	14	11.5	4.6
13" ADJ ROOF FLASHING	13ARF	28 ga	Galvanized Steel	16	15	11.25	4.4
15" ADJ ROOF FLASHING	15ARF	28 ga	Galvanized Steel	17.5	15	11.5	5.5
16" ADJ ROOF FLASHING	16ARF	28 ga	Galvanized Steel	19	16	11.5	5.7
17" ADJ ROOF FLASHING	17ARF	28 ga	Galvanized Steel	20.5	17	12.5	5.7

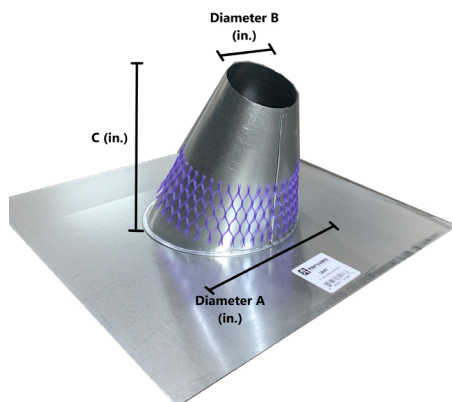

## Highlights & Benefits

- Galvanized Steel with 28 Gauge Thickness
- Weights Ranging from 1.8 lbs. to 5.7 lbs.
- 18 Different ARF with Size Ranges from 3 in. to 17 in.
- Designed to Fit Double-Wall Flue Pipe & Ideal for Pitched Roofs
- Used to Weatherproof the Vent Pipe Penetration Through the Roof